



**NOTES**







- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH NETWORK STANDARDS NS114, NS116 AND NS177.
- FOR HV, EARTH AND PROTECTION CONDUIT POSITIONS REFER TO SUBSTATION LAYOUT DRAWING. IF CONDUIT LAYOUT ALTERS TO THAT SHOWN HERE, THE POSITION OF JUNCTION BOX AND EARTH BAR MUST BE ALTERED ACCORDINGLY SUCH THAT THEY ARE LOCATED ABOVE THEIR RESPECTIVE CONDUITS.
- CABLE EARTH DRAINAGE BONDS AND SCREENS ARE TO BE CONNECTED TO THE TRANSFORMER EARTH BAR (ITEM 8). 2 x 70mm sq CABLES ARE TO CONNECT THE TRANSFORMER EARTH BAR TO THE SUBSTATION EARTH BAR. TRANSFORMER TANK EARTH CABLES ARE NOT TO BE CONNECTED.
- EARTH CABLES ARE TO BE CONNECTED USING CABLE LUGS. REFER DETAIL 2.
- THE HV CURRENT TRANSFORMER MOUNTING FRAME IS TO BE CONSTRUCTED USING UNISTRUT CHANNEL AS INDICATED, INCLUDING SUITABLE UNISTRUT BOLTS, NUTS & WASHERS.
- THE HV CURRENT TRANSFORMER JUNCTION BOX AND EARTH BAR ARE TO BE ATTACHED TO THE MOUNTING FRAME USING SUITABLE UNISTRUT BOLTS, NUTS & WASHERS.
- CABLE GLANDS ARE TO BE USED FOR CABLE ENTRY INTO JUNCTION BOXES. ALL CABLES ARE TO BE CONNECTED TO TERMINAL BLOCKS VIA SUITABLY SIZED CABLE LUGS.
- HV CURRENT TRANSFORMER LEADS ARE TO BE SECURED INSIDE VERTICAL UNISTRUT (ITEM 1) AS NECESSARY. CABLE TIES ARE TO BE USED TO SECURE CT LEADS TO THE HV CT MOUNTING FRAME WHERE REQUIRED.
- THE G-RAIL (ITEM 14) IS TO BE MOUNTED TO THE JUNCTION BOX BY SELF-TAPING SCREWS. ALL SHARP EDGES ARE TO BE REMOVED.
- FOR FIXING INTO THE CONCRETE FLOOR USE HILTI HVU CHEMICAL CAPSULE WITH 12 HAS-E-F (GALVANISED) ROD, 110mm EMBEDMENT.
- ALL MATERIALS SHOWN CAN BE SUBSTITUTED AS LONG AS THE SUBSTITUTE COMPONENT PROVIDES SIMILAR OR BETTER PERFORMANCE THAN THE ONE SHOWN. DETAILS PROVING THE PERFORMANCE OF OTHER PRODUCTS MUST BE SUBMITTED FOR ACCEPTANCE, IN ACCORDANCE WITH THE REQUIREMENTS OF NETWORK STANDARD NS181, BEFORE USE.
- IF OAFD PROTECTION IS INSTALLED IN THE SUBSTATION A NEUTRAL/EARTH FAULT CURRENT TRANSFORMER (ITEM 16) IS REQUIRED TO BE INSTALLED ON EACH DISTRIBUTION TRANSFORMER. THE CABLES CONNECTING THE NEUTRAL/EARTH FAULT CURRENT TRANSFORMER TO THE PROTECTION PANEL ARE TO BE INSTALLED IN A SUITABLY SIZED FLEXIBLE CONDUIT. THESE CABLES ARE TO BE CONNECTED TO THE STUD ON THE CT WITH SUITABLE CABLE LUGS. THE FLEXIBLE CONDUIT IS TO RUN FROM THE CONNECTIONS AT THE CURRENT TRANSFORMER TO THE PROTECTION CONDUIT ASSOCIATED WITH THE DISTRIBUTION TRANSFORMER. ANY VERTICAL RUN OF THE FLEXIBLE CONDUIT MUST BE SUPPORTED BUT THE FLEXIBLE CONDUIT CAN BE LAID ON THE FLOOR UNDER THE DISTRIBUTION TRANSFORMER.
- UNISTRUT TYPE TF TREFOIL CABLE CLAMP IS TO BE USED IN CONJUNCTION WITH THE RUBBER LINER SPECIFIED.
- THIS PROTECTION CURRENT TRANSFORMER IS REQUIRED FOR USE ON 11KV CBD SUBSTATIONS.
- A SECOND SET OF HV CURRENT TRANSFORMERS IS REQUIRED FOR OAFD IN CBD SUBSTATIONS. REFER TO DRAWING 221380 FOR FURTHER DETAILS.

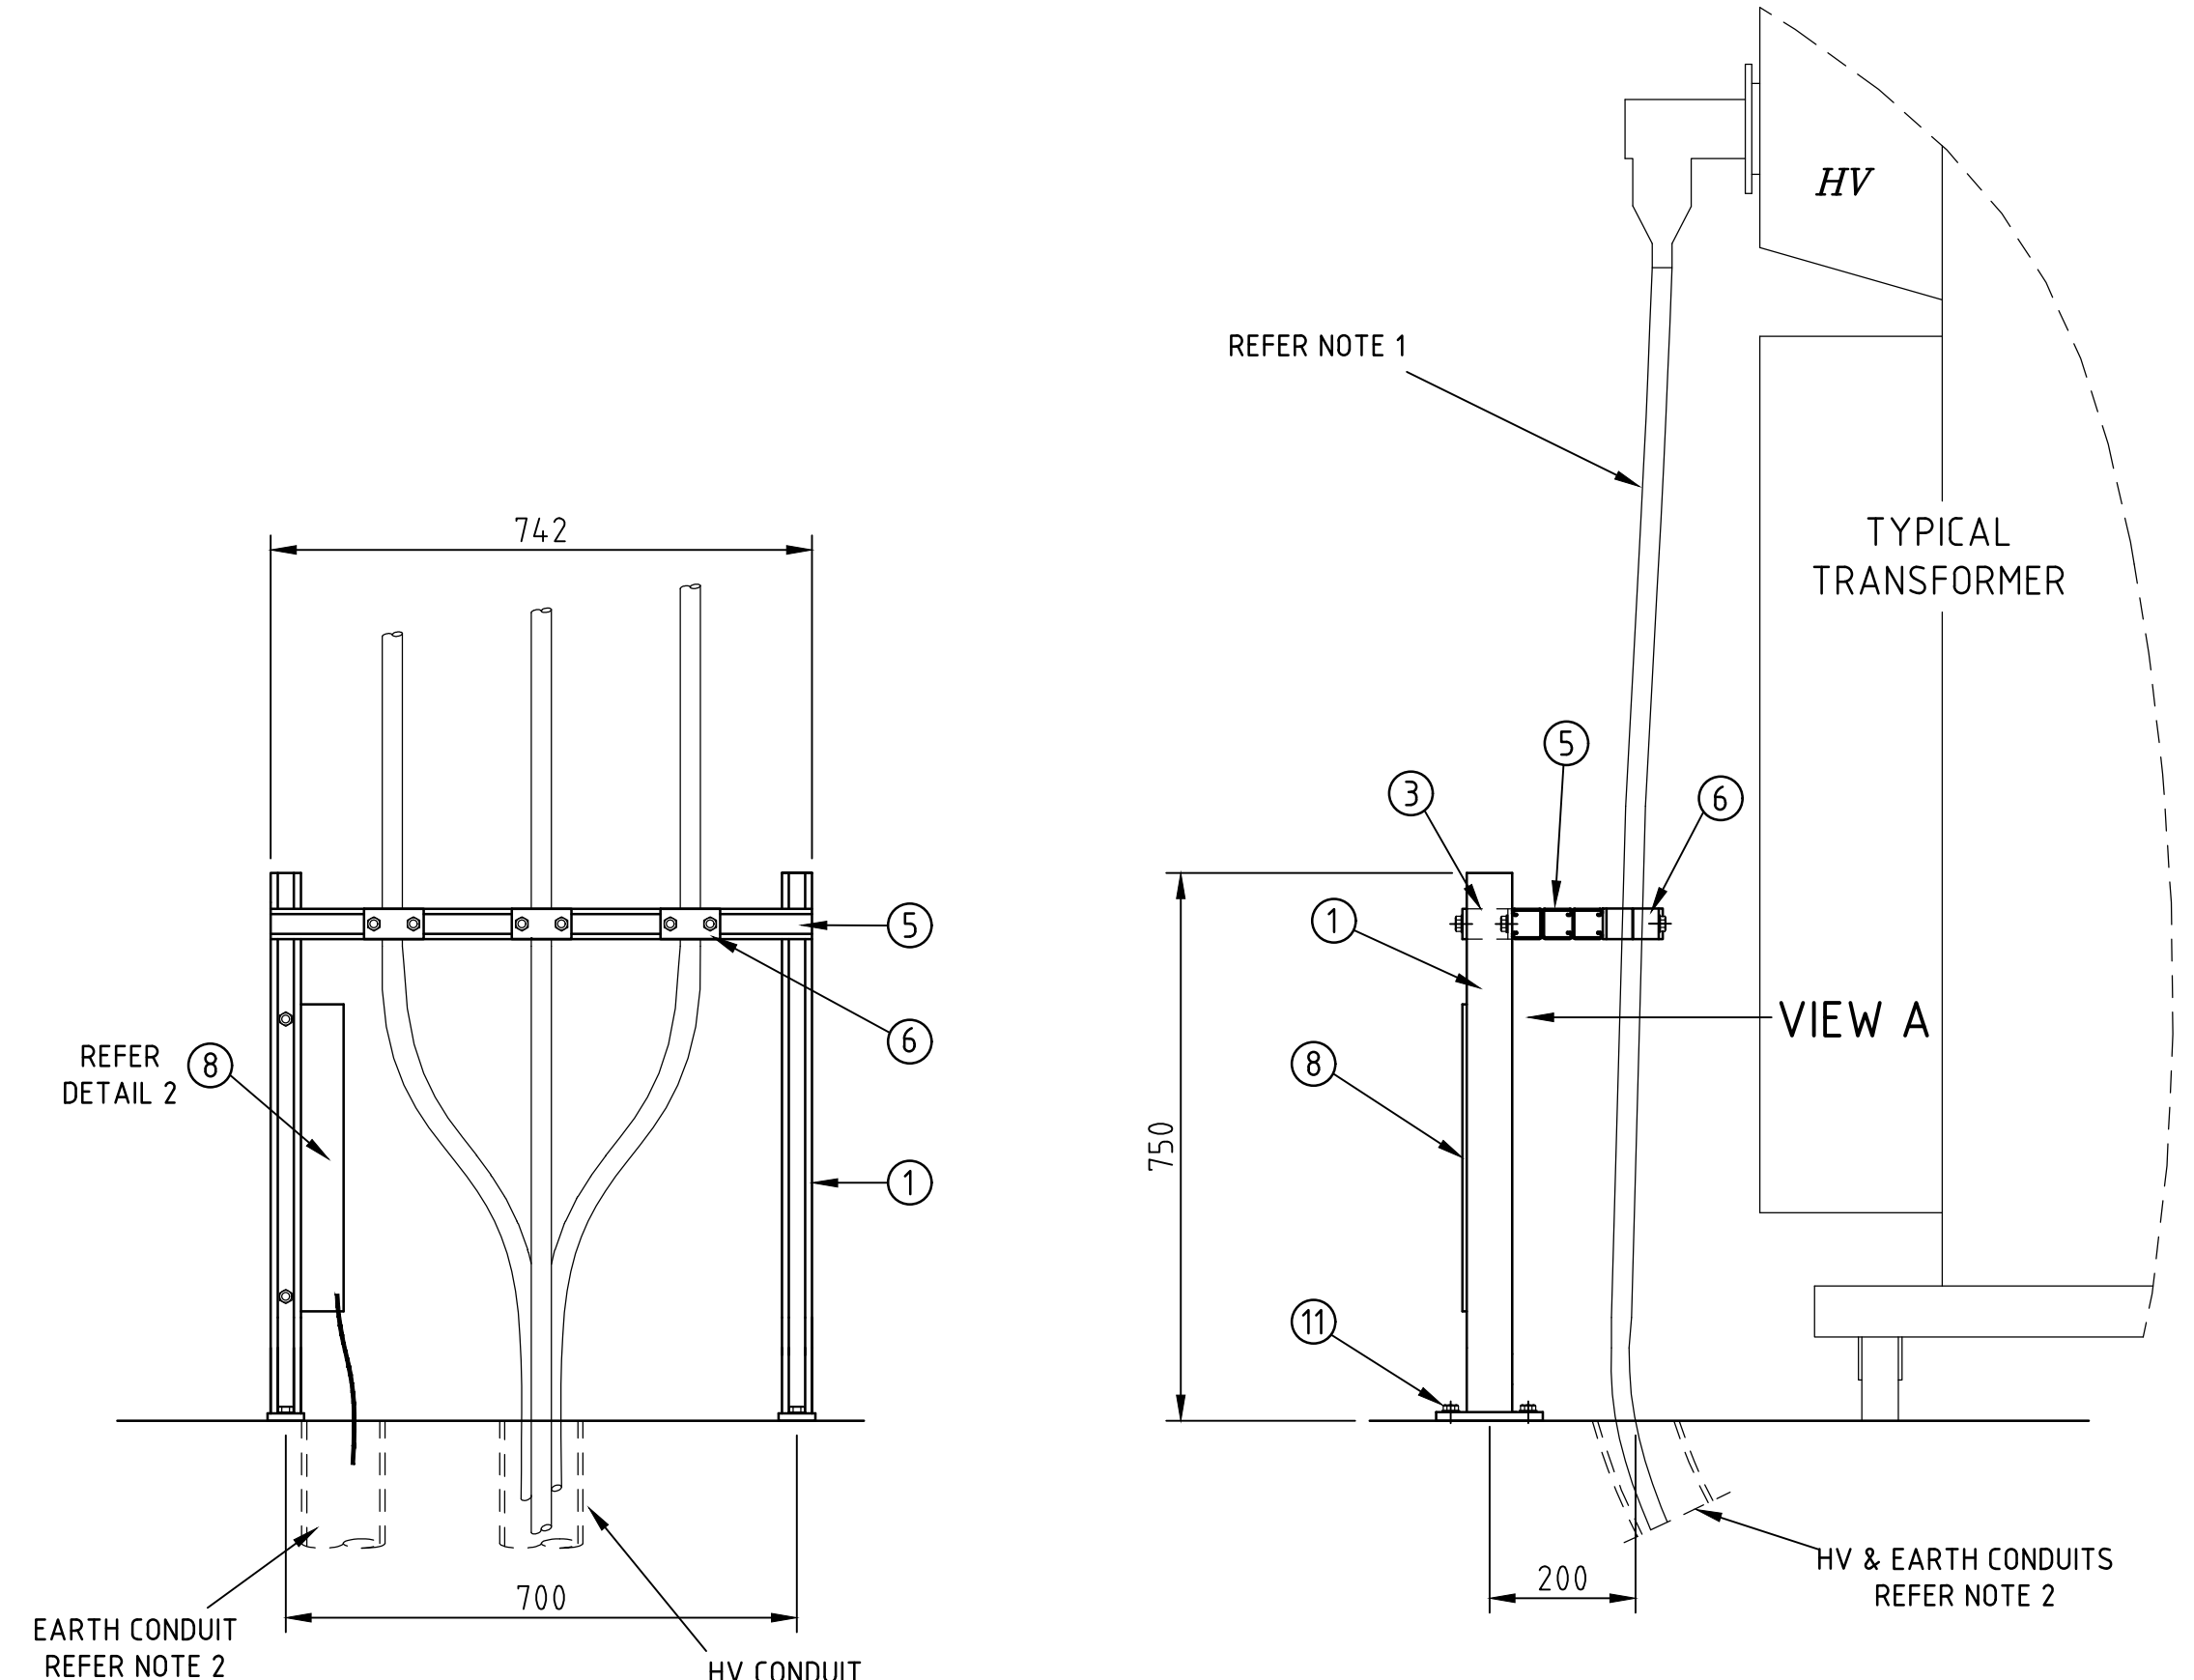

**EARTH BAR AND CABLE SUPPORT MOUNTING DETAILS**  
SCALE 1:10

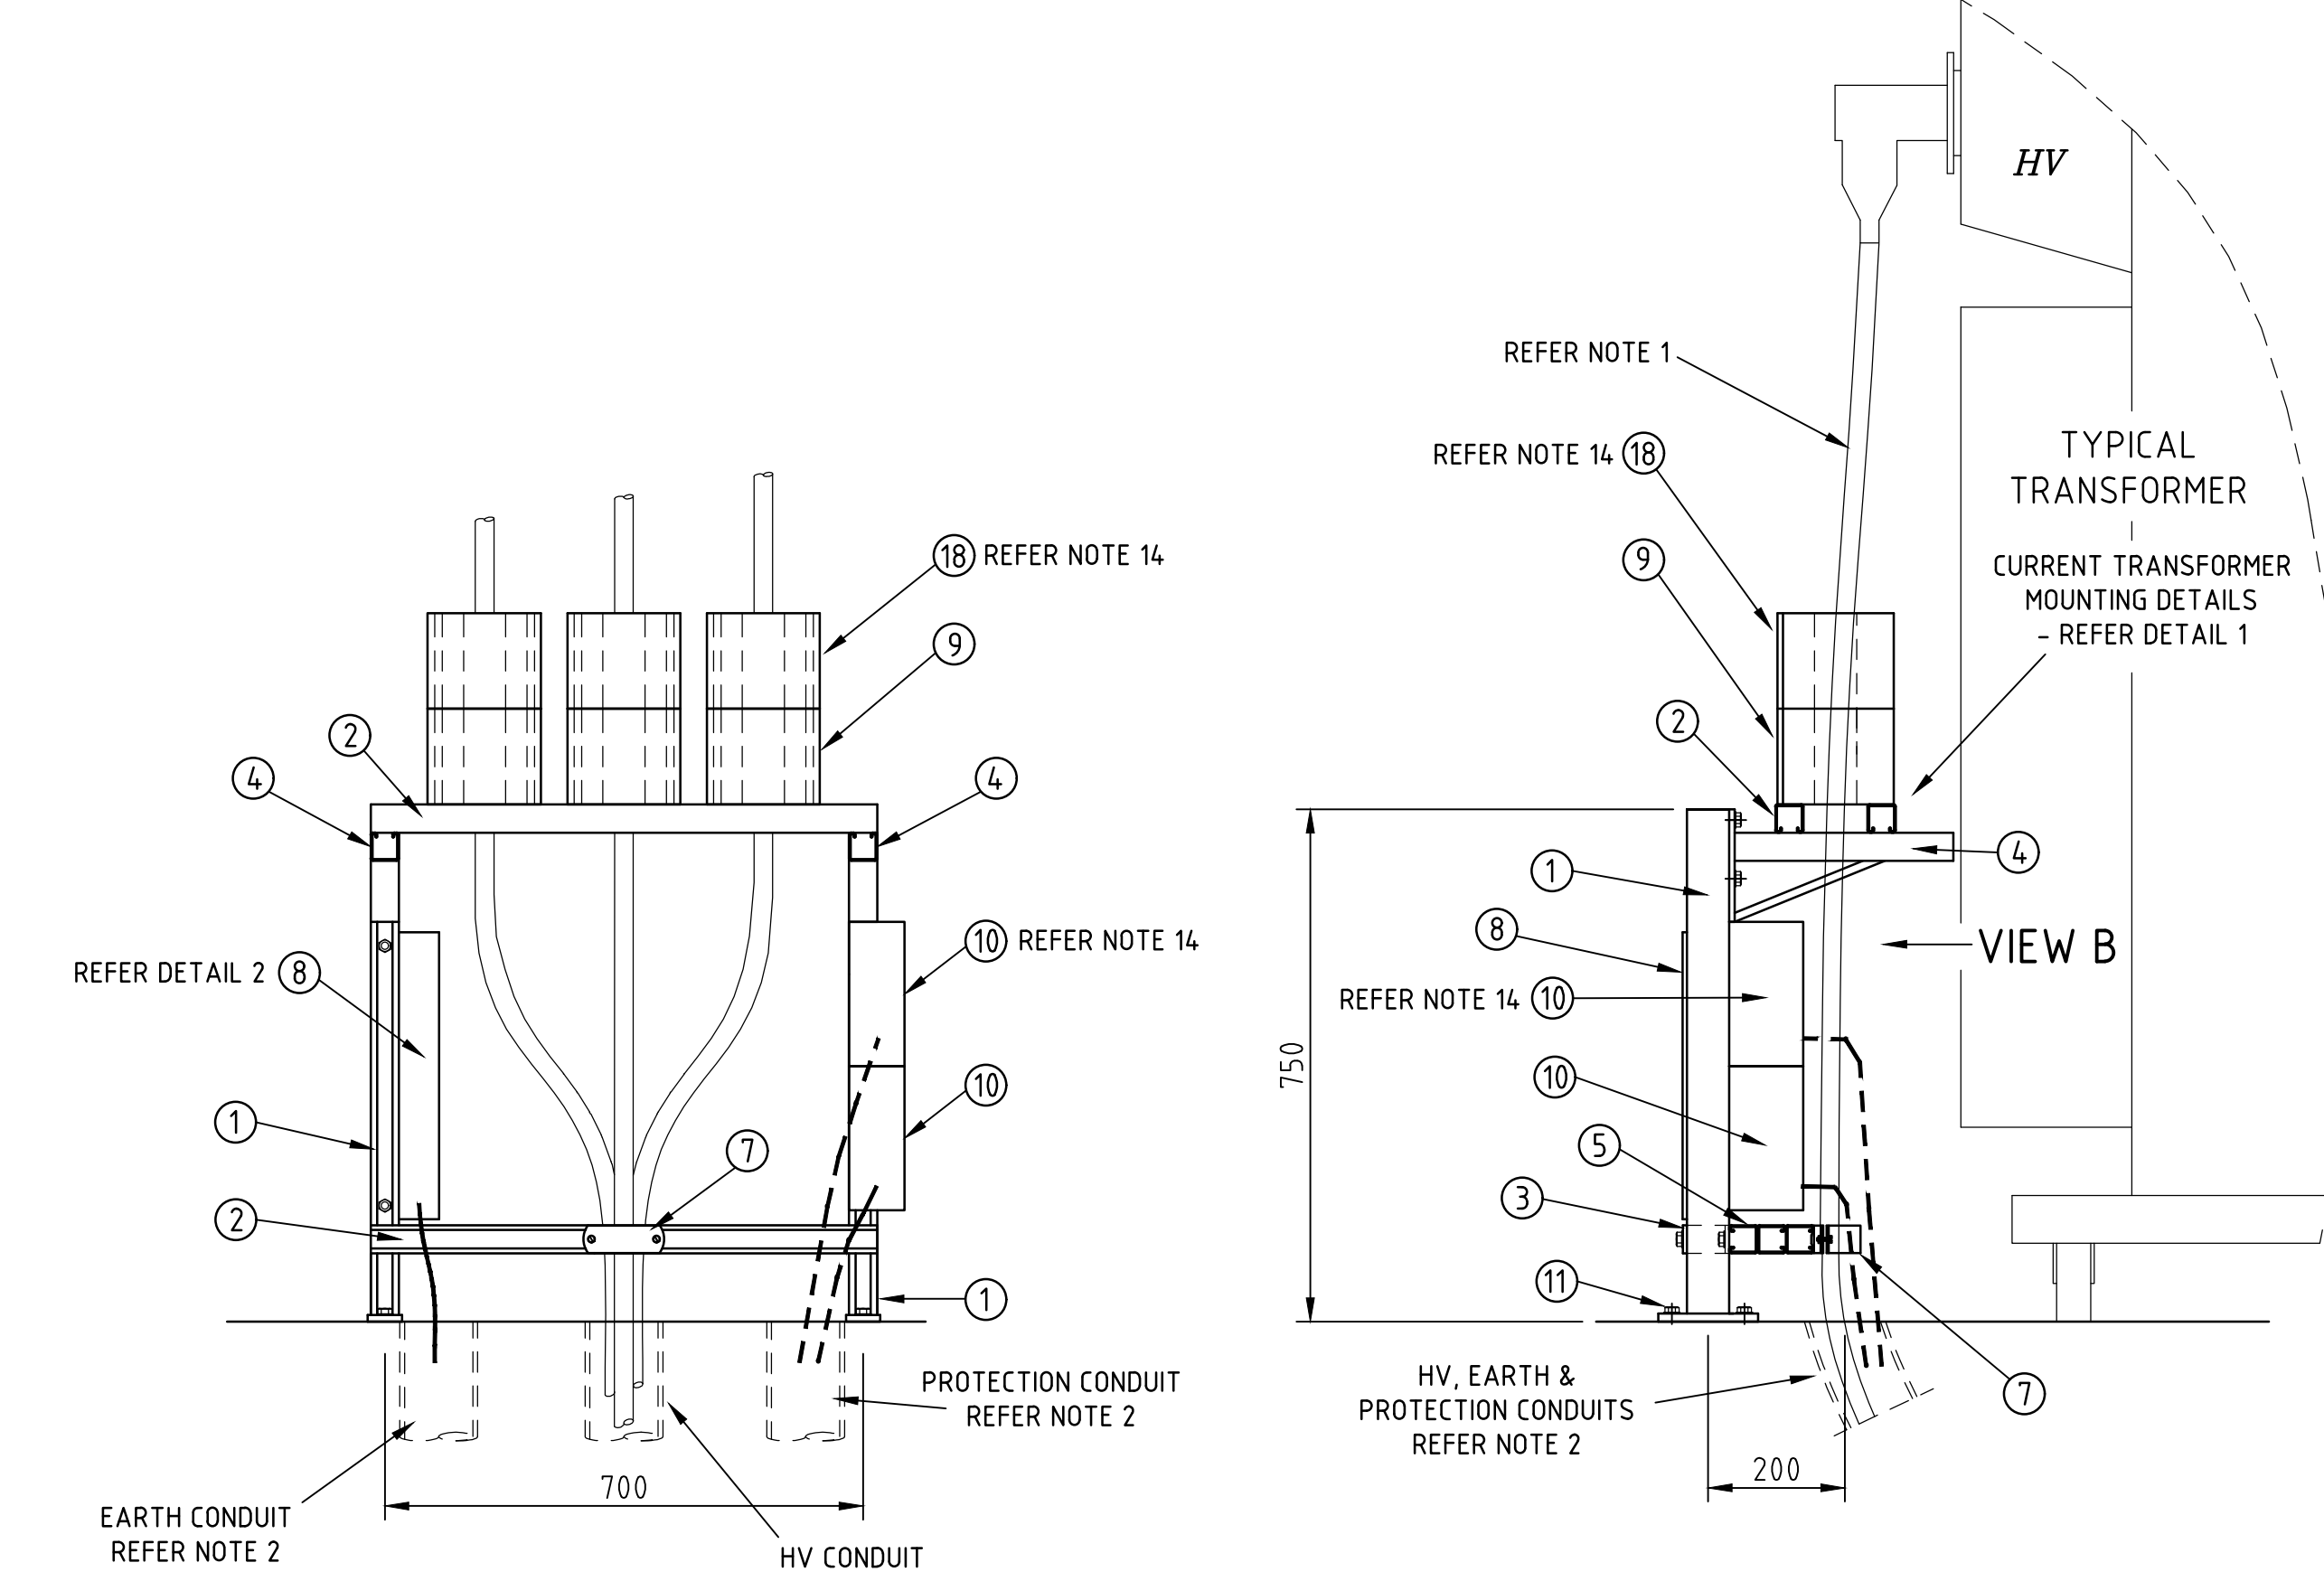


**EARTH BAR AND HV CURRENT TRANSFORMER MOUNTING DETAILS**  
SCALE 1:10

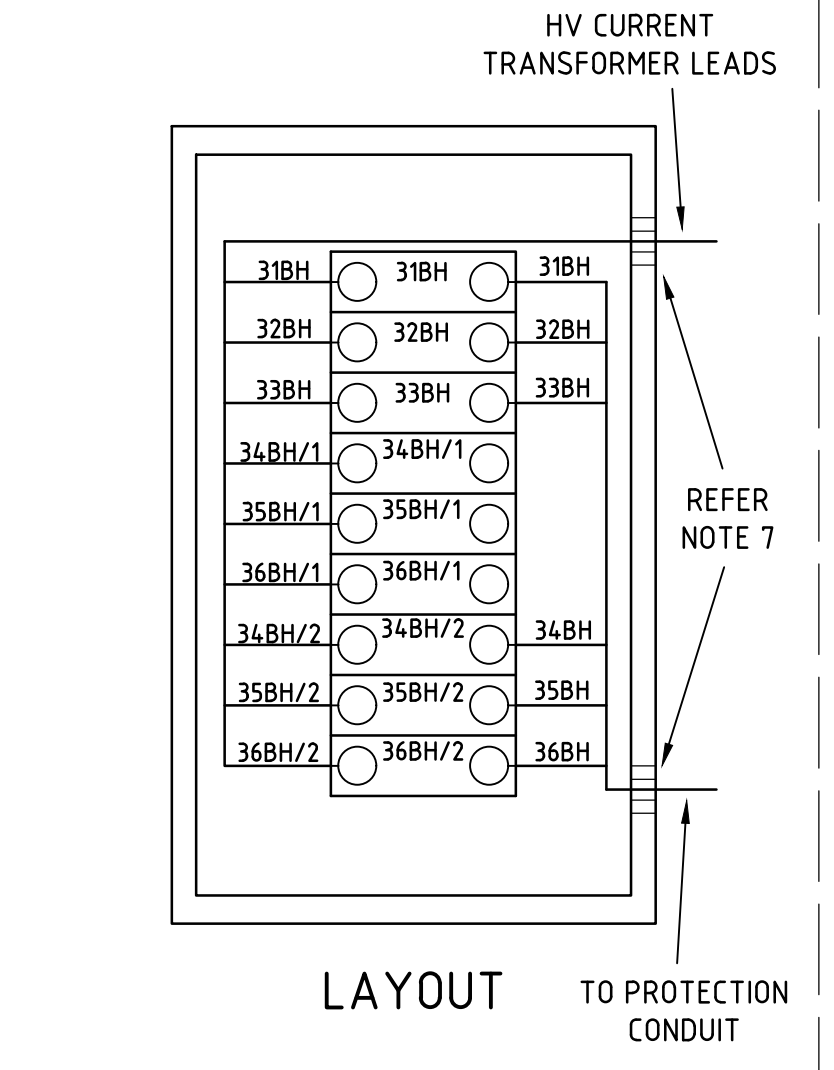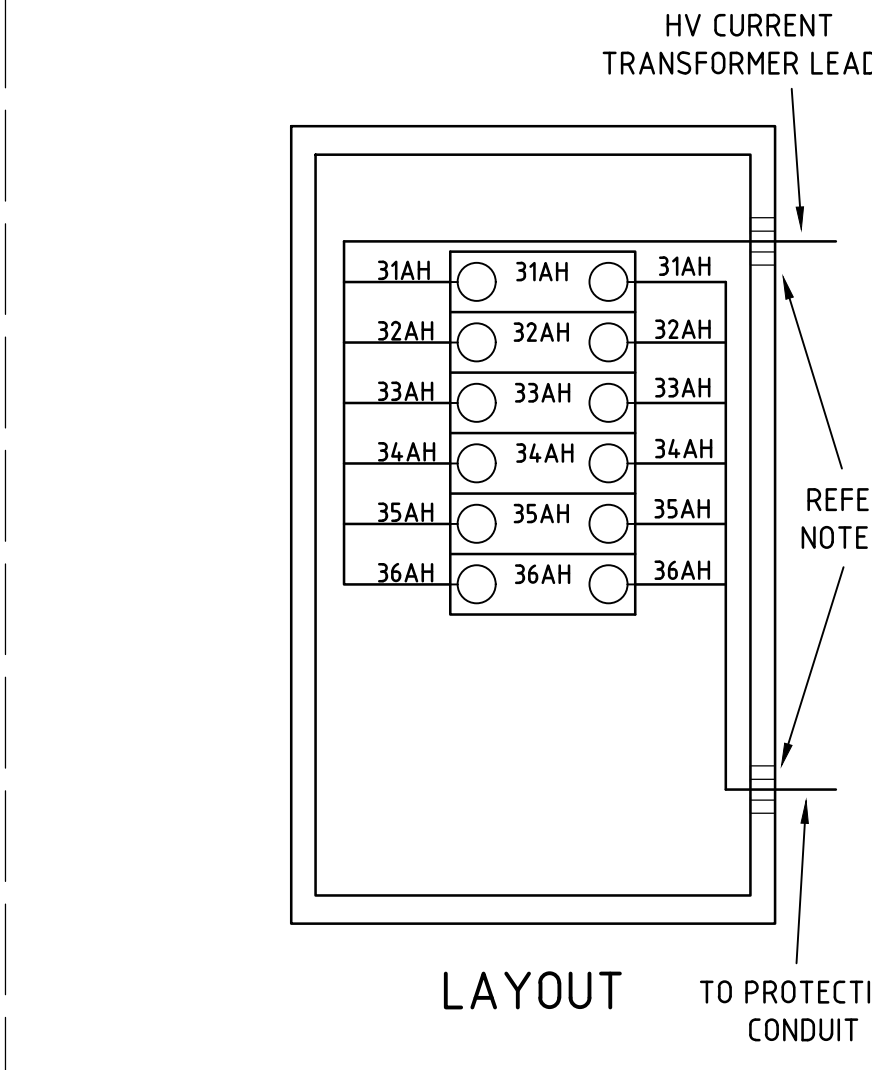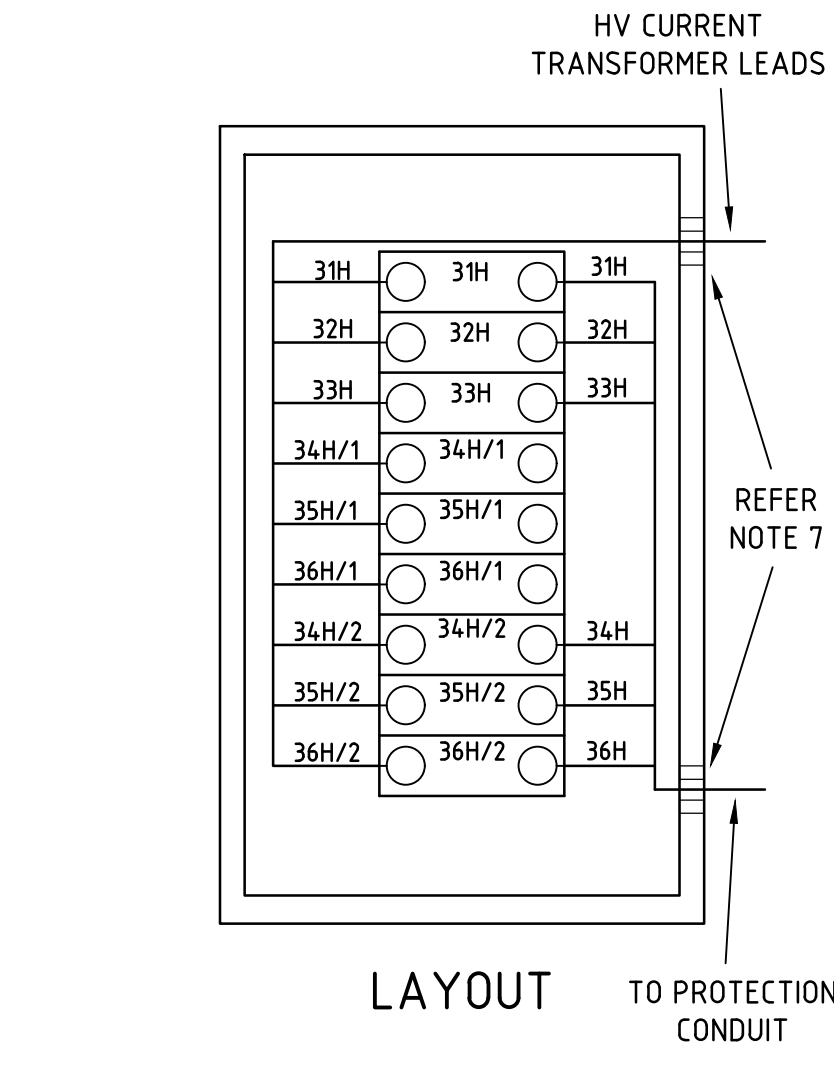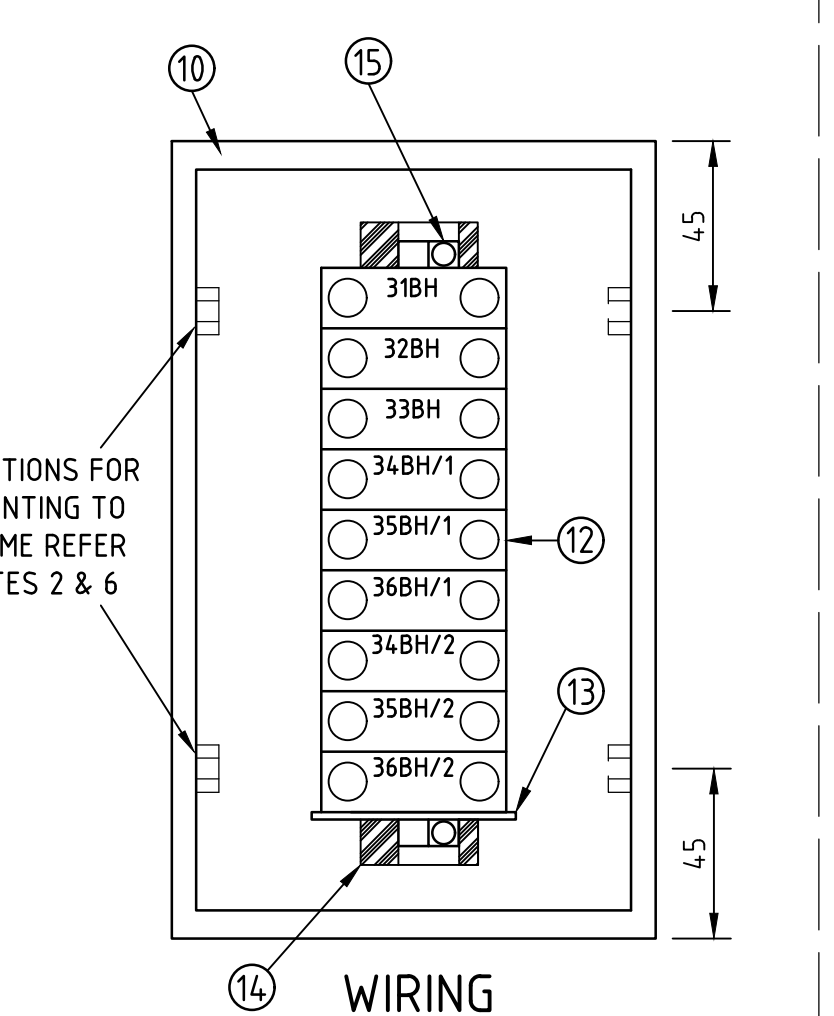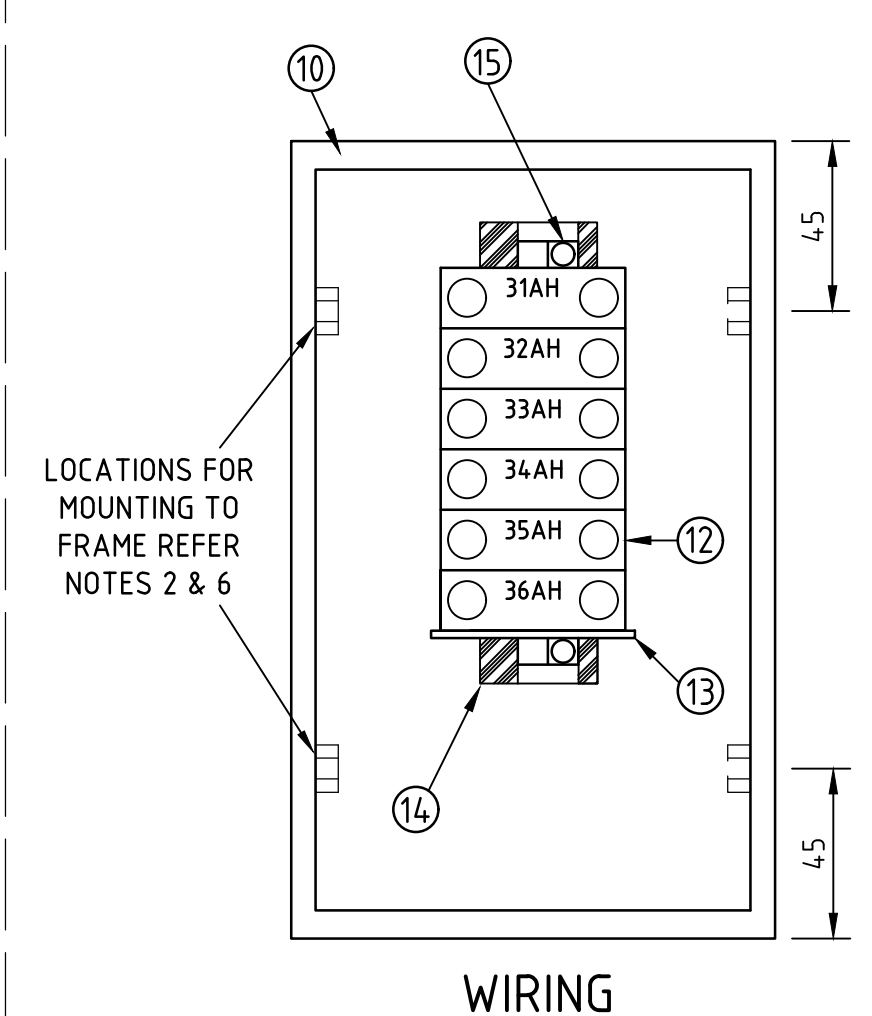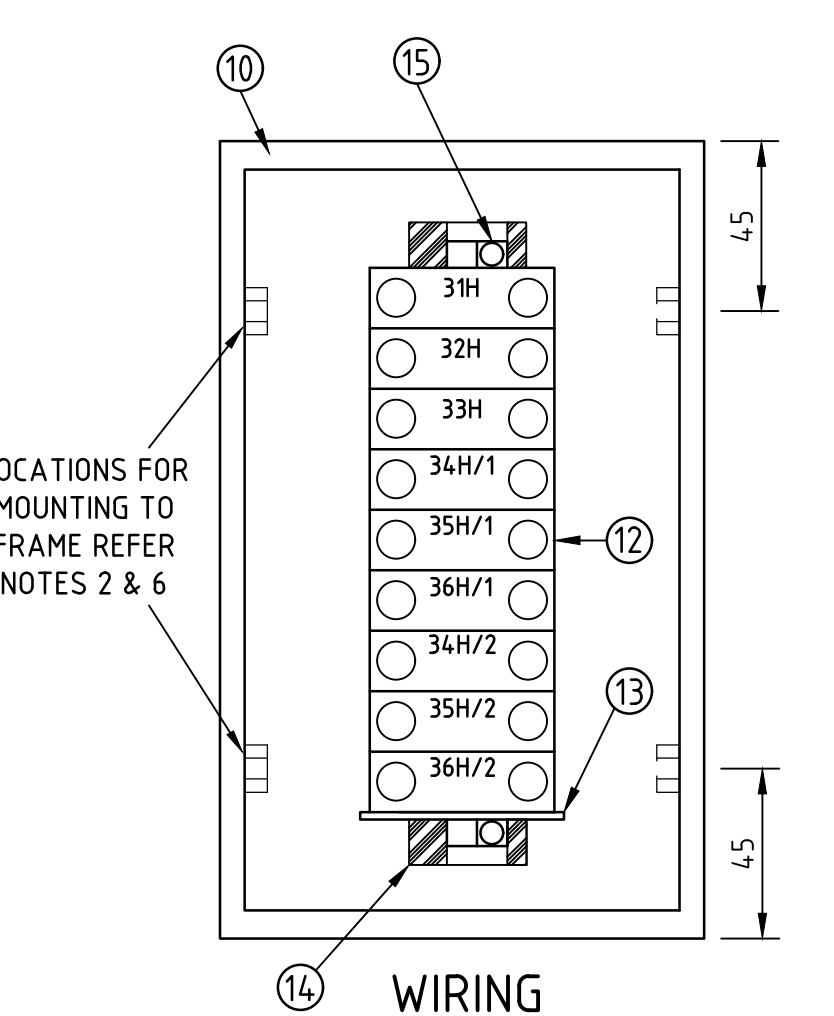


**LAYOUT AND WIRING DIAGRAM OF HV CURRENT TRANSFORMER JUNCTION BOX (FOR ITEM 9a or 9b) - SUBURBAN RMICB SUBSTATIONS**  
NOT TO SCALE

**LAYOUT AND WIRING DIAGRAM OF HV CURRENT TRANSFORMER BOTTOM JUNCTION BOX (FOR ITEM 9a) - CBD SUBSTATIONS ONLY**  
NOT TO SCALE


**LAYOUT AND WIRING DIAGRAM OF HV CURRENT TRANSFORMER TOP JUNCTION BOX (FOR ITEM 18) - CBD SUBSTATIONS ONLY**  
NOT TO SCALE

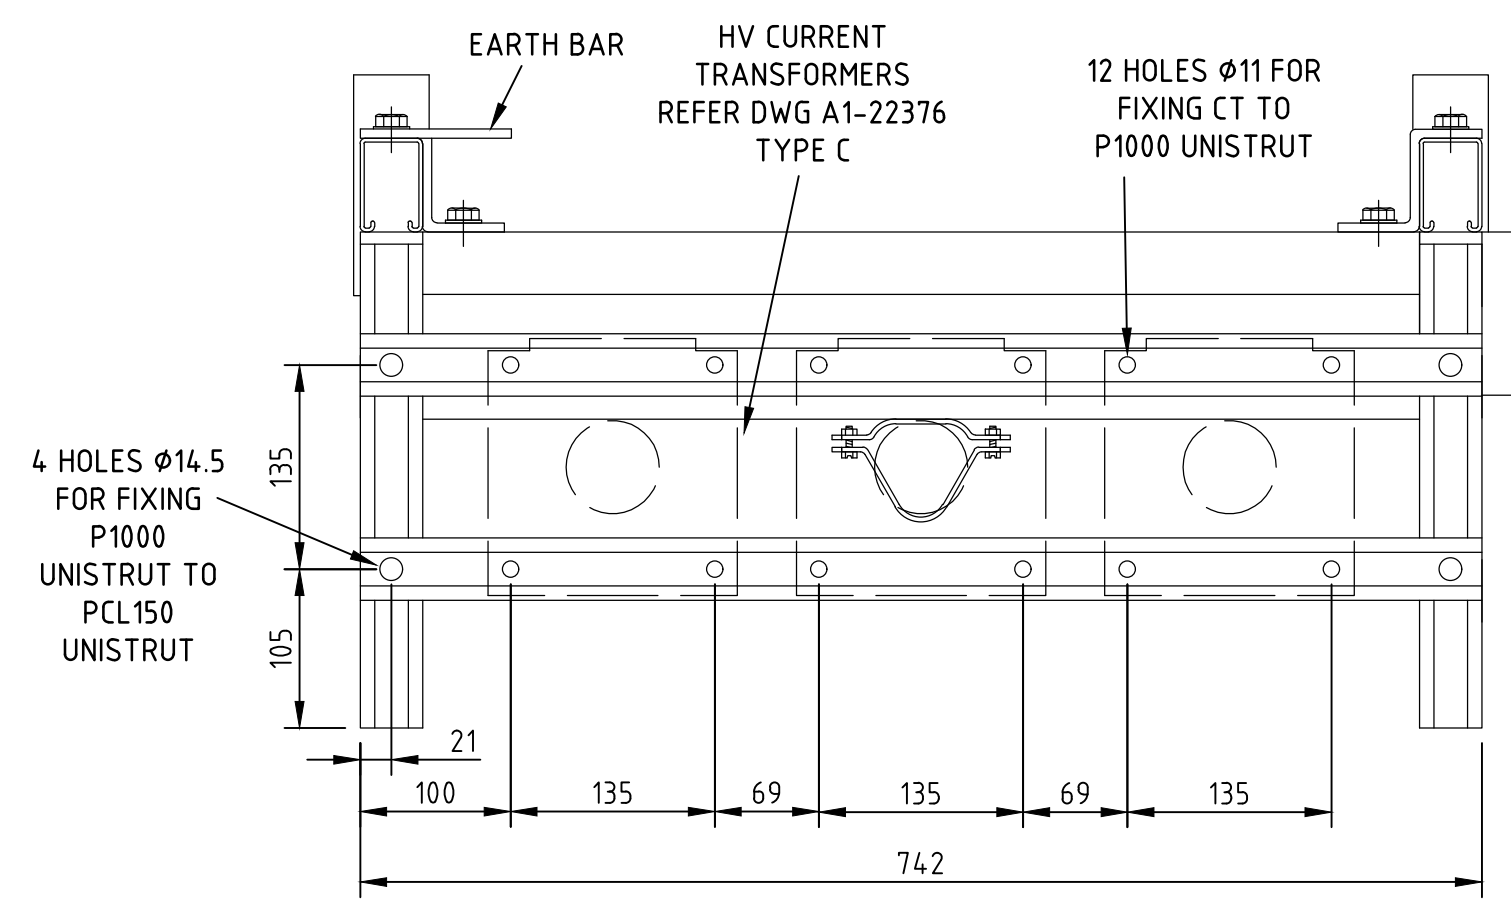


**DETAIL 1 HV CURRENT TRANSFORMER MOUNTING FRAME FOR OAFD EQUIPPED SUBSTATIONS**  
SCALE 1:5

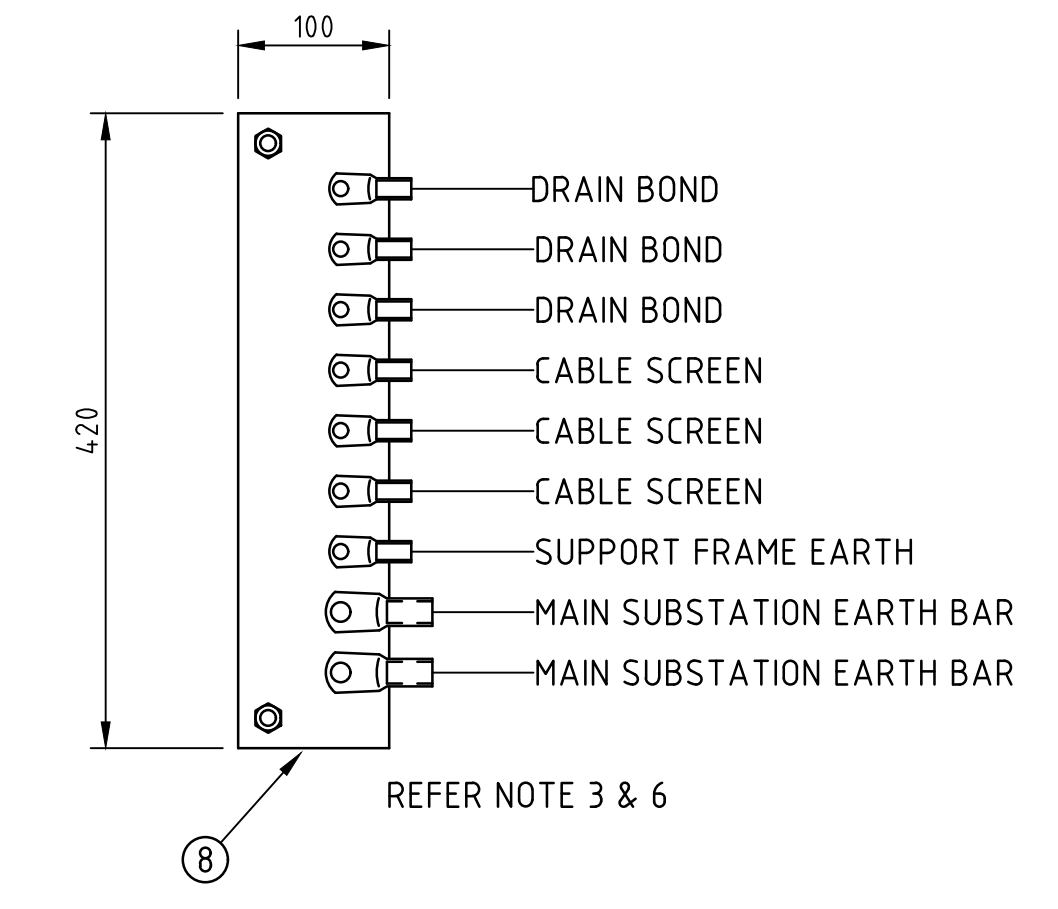

**DETAIL 2 MINIMUM TRANSFORMER EARTH BAR REQUIREMENTS**  
SCALE 1:5

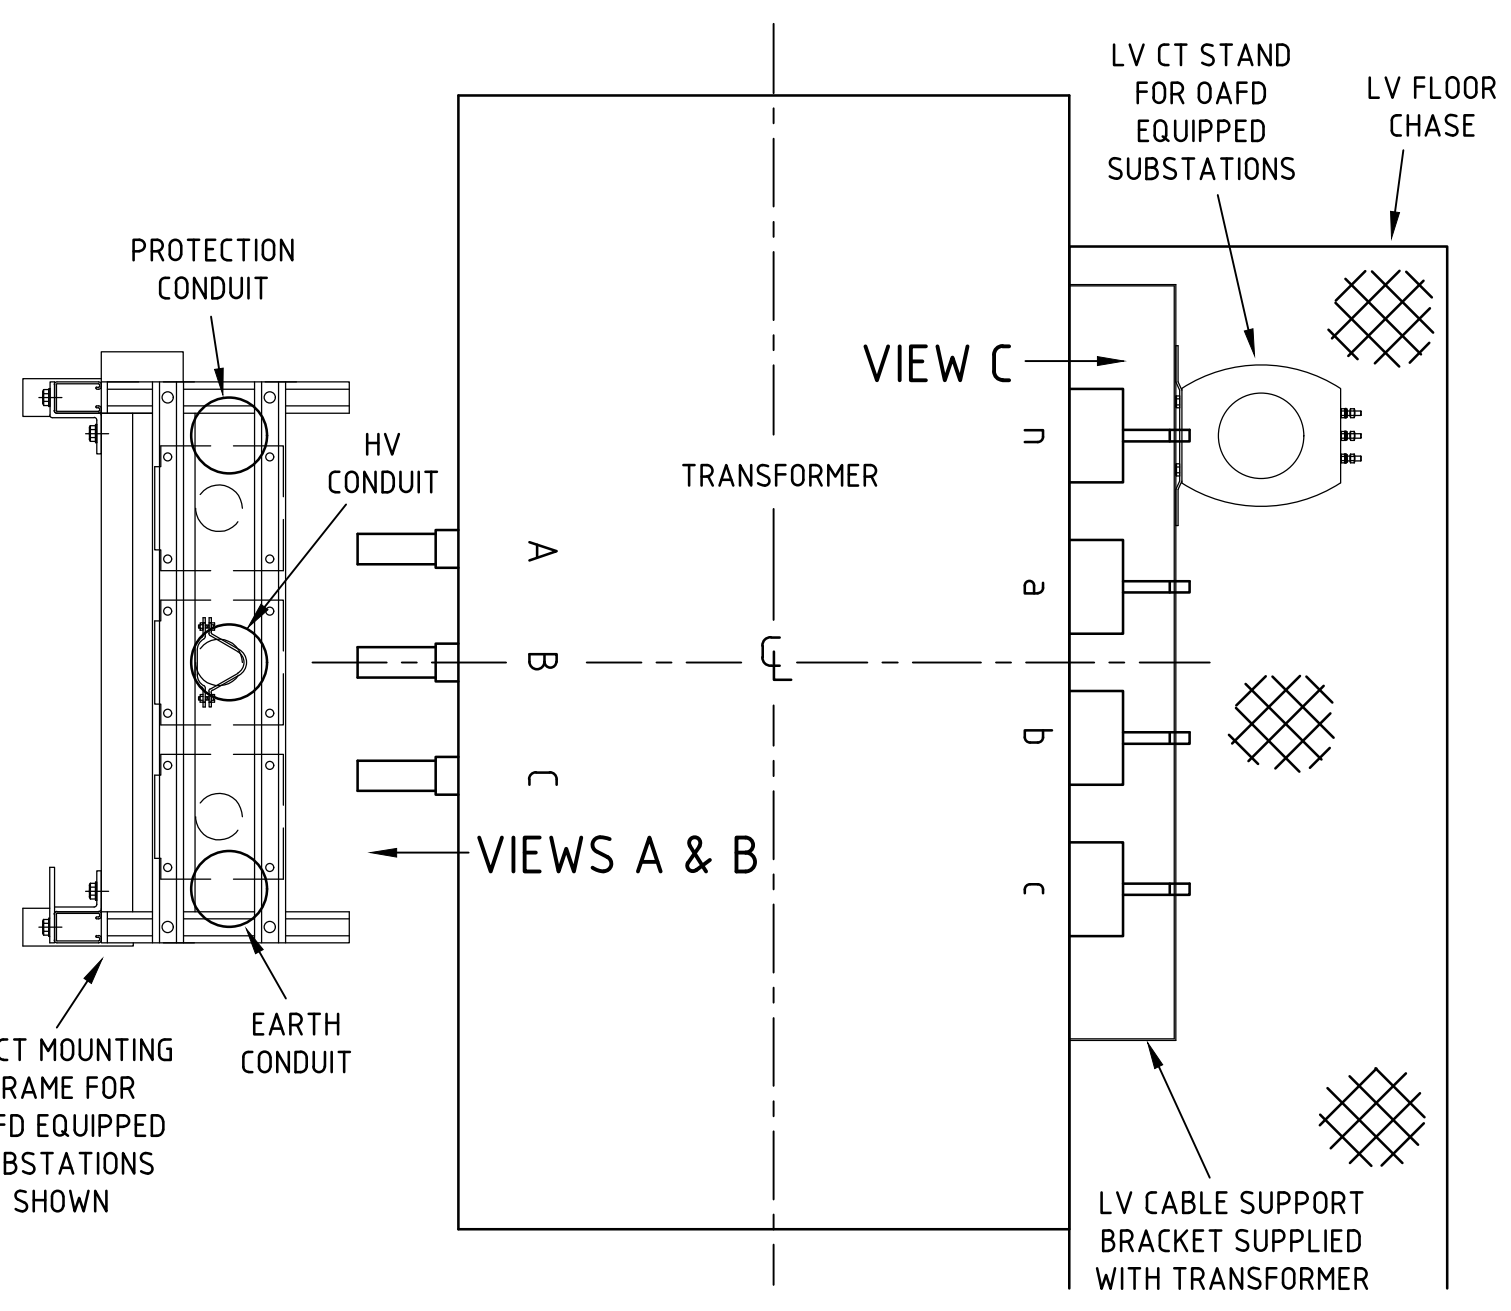

**PLAN VIEW OF TRANSFORMER**  
SCALE 1:10

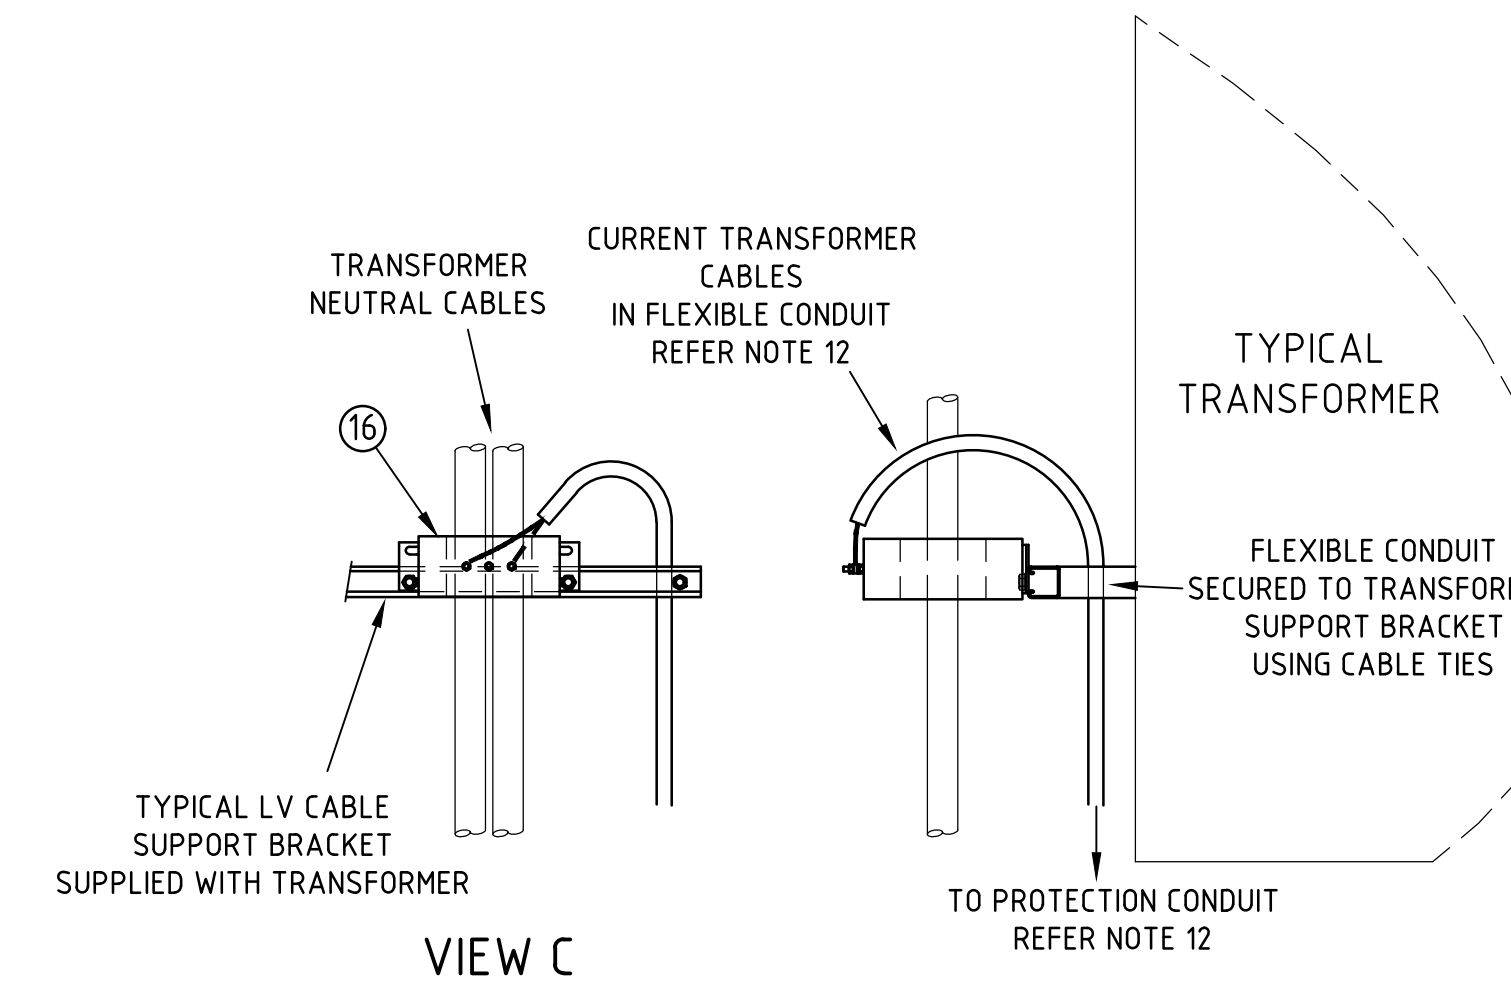

**VIEW C LV NEUTRAL/EARTH FAULT CURRENT TRANSFORMER MOUNTING DETAILS**  
SCALE 1:10

MATERIAL LIST							
ITEM	DESCRIPTION	MATERIAL	STOCKCODE	NUMBER OFF			REMARKS
				VIEW A	VIEW B	VIEW C	
1	P5663-750 UNISTRUT	GALVABOND	-	2	2	-	REFER NOTE 5
2	P1000 UNISTRUT 742mm LENGTH	GALVABOND	-	-	2	-	REFER NOTE 5
3	P5545 UNISTRUT	GALVABOND	-	2	2	-	REFER NOTE 5
4	PCL150 UNISTRUT	GALVABOND	-	-	2	-	REFER NOTE 5
5	P1001 - 3 UNISTRUT 742mm LENGTH	GALVABOND	-	1	1	-	REFER NOTE 5
6	CABLE CLAMP & NITRILE RUBBER LINER	-	180291 & 179201	3	-	-	-
7	UNISTRUT TYPE TF SERIES CABLE CLAMP & NITRILE RUBBER LINER	STAINLESS STEEL	-	1	-	-	REFER NOTE 13
8	420mm x 100mm x 6.3mm EARTH BAR	TINNED COPPER	-	1	1	-	REFER NOTES 3 & 4
9	PROTECTION CURRENT TRANSFORMER	-	89722	-	3	-	REFER NOTES 7 & 14
10	CLIPSAL 265/5 JUNCTION BOX	PLASTIC	-	-	1(2)	-	REFER NOTES 6, 7, 14
11	12mm CHEMICAL ANCHOR	-	-	4	4	-	REFER NOTE 10
12	UTILUX H3820 LINK	STAINLESS STEEL	-	-	9(15)	-	-
13	UTILUX H3821 END PLATE	-	-	-	1(2)	-	-
14	UTILUX H2233 G-RAIL 170mm LENGTH	-	-	-	1(2)	-	REFER NOTE 9
15	UTILUX H2232 END CLAMP	-	-	-	2(4)	-	-
16	LV NEUTRAL/EARTH FAULT CURRENT TRANSFORMER	-	67173	-	-	1	REFER NOTE 12
17	FLEXIBLE CONDUIT	-	-	-	-	1	-
18	PROTECTION CURRENT TRANSFORMER	-	60327	-	3	-	REFER NOTES 7 & 16

**1. NOTES REVISED:**

09/10/2014  
I.ROBSON  
P.JARVIS  
APPROVED  
PN: ES103/59/1/2

**2. EARTH BAR AND CABLE SUPPORT MATERIALS LIST ADDED:**

10/09/2007  
I.ROBSON  
P.JARVIS  
APPROVED  
PN: ES208/66/9/2

**3. ITEM 9 WELD MESH SCREEN REARRANGED NOTE 10 ADDED:**

30/04/2008  
C.PETROWSKI  
I.ROBSON  
P.JARVIS  
APPROVED  
PN: ES208/66/9/2

**4. MATERIAL WAS STAINLESS STEEL. NOTE 11 ADDED:**

26/09/2003  
R.LALALA  
I.ROBSON  
P.JARVIS  
APPROVED  
PN: ES208/66/9/2

**5. NEW AUSGRID BORDER AND LOGO ADDED:**

24/09/2003  
T.LAMPARD  
APPROVED

**6. NEW B1 SIZED DRAWING MADE. ITEM 1 DIVIDED INTO 9a and 9b. LIST OAFD TRANSFORMER MATERIALS. CURRENT TRANSFORMER MOUNTING ADDED. NOTE 12 ADDED:**

16/11/2003  
P.JARVIS  
C.MABBOTT  
APPROVED  
PN: 02-2035-L-2901

**7. ADDITIONAL HV CT, JUNCTION BOX AND LAYOUT & WIRING DIAGRAM ADDED FOR CBD SUBSTATIONS ONLY. HV CT STAND UPGRADED FOR OAFD EQUIPPED SUBSTATIONS. 13 TO 16 ADDED. ITEM 18 ADDED TO MATERIAL LIST. ITEM 1 WAS 50000 UNISTRUT. ITEMS 1, 5 & 7 DESCRIPTIONS UPDATED TO INST.**

04/04/2016  
M.CHARAN  
I.ROBSON  
P.JARVIS  
APPROVED  
PN: OPEX-6568-1-1-6

**8. NOTES & MATERIAL LIST AMENDED:**

28/08/2012  
P.JARVIS  
I.ROBSON  
P.TURRIN  
G.FORD  
APPROVED

**9. BORDER & TITLE BLOCK UPDATED:**

10/09/2014  
M.BENNETT  
I.ROBSON  
P.JARVIS  
APPROVED

**Ausgrid**  
24-28 Campbell Street  
SYDNEY NSW 2000

ISSUED FOR CONSTRUCTION

SCALE: AS SHOWN  
DESIGNED: P.JARVIS/I.ROBSON  
DRAWN: I.ROBSON  
CHECKED: P.JARVIS  
APPROVED: M.PEAcock  
DATE: 19/05/2004  
TRIM REF: -

PROJECT NUMBER: ES 103-59-1-2

DRAWING No: 162655

SHEET 1

AMD 9

SIZE B1

**INDOOR OIL FILLED DISTRIBUTION TRANSFORMERS MOUNTING OF CURRENT TRANSFORMERS AND EARTH BAR DRAWING TITLE**